

WV128

MODEL

- Adjustable Setpoints
Programmable HI or LO
Failsafe or Non-failsafe
- Greatly Improved Input/
Output Accuracy and
Stability
- Configurable with or
without Ethernet Connec-
tion
- Direct Access to Sensor
Data when Connected to
the Intranet
- Provides Remote Diagnos-
tic Capability (with
optional WVC16)
- Versatile Alarm Capabilities
Provide Email Notification
when Problems Occur
(with optional WVC16)
- Lifetime Warranty



WV Series I/O Thermocouple Input, Limit Alarm

Provides Relay Contact Closure(s) at a preset Temperature Input Level

DESCRIPTION

The WV Series I/O from Eurotherm Action Instruments is an exciting new line of isolating signal conditioners. This new line provides features never before found in traditional signal conditioners. The WV Series has greater input and output accuracy than most signal conditioners on the market today. In addition, the stability of the unit beats that of most signal conditioners as well. The WV Series provides the user with the capability to view sensor data directly over your company's intranet with a standard web browser. Just imagine, the WV Series will allow you to view configuration, maintenance and process information through a remote web browser. Further, the modules are capable of generating e-mail messages, triggered when process variables or maintenance based performance parameters exceed or fall below pre-set levels.

The WV128 is a Thermocouple Input Limit Alarm with dual setpoints and two contact closure outputs. The field configurable input and alarm functions offer flexible setpoint capability. There are seven thermocouple types from which to choose, B, E, J, K, R, S and T. All ranges allow the setpoints to be fully adjustable throughout the whole range.

There are two versions of the WV128, the WV128-0000 and the WV128-0001. The WV128-0000 contains standard SPDT relays. When power is removed, the relays revert to their non-powered state. The WV128-0001 contains latching relays. Whatever position they are in when power is removed is where they will remain when power is re-applied. A reset switch is provided to reset the relays after the alarm is no longer true. Both models are configurable as a single or dual setpoint alarm, with HI or LO trips. The WV128-0000 supports failsafe or non-failsafe operation.

OPERATION

The field configurable WV128 limit alarm setpoints can be configured for HI or LO, failsafe or non-failsafe operation (failsafe only available on the -0000). Each of the setpoints has a respective HI or LO deadband. In a tripped condition, the setpoint is exceeded and the appropriate red LED will illuminate. The trip will reset only when the process falls below the HI deadband or rises above the LO deadband. (The WV128-0001 requires pressing the reset switch in order to reset the relay after being tripped.) The deadband can be left at the minimum level (the factory default) or can be set to whatever level is desired. In failsafe operation (-0000 only), the relay is energized when the process is below the HI setpoint or above the LO setpoint (opposite for non-failsafe). In the failsafe mode, a power failure results in an alarm state output.

ENHANCED LED DIAGNOSTICS

Other than when executing the push button calibration routine, the LEDs blink under the following conditions:

RUN (Green):

On when unit is powered
Flashes at 2Hz when input under range.
Flashes at 8Hz when input over range.

SETPOINT A (Red):


On when Setpoint A is tripped.
Status for setting Setpoint A
Flashes while calibrating the input level

SETPOINT B (Red):

On when Setpoint B is tripped
Status for setting Setpoint B
On while calibrating the input level

An Under range condition exists when the signal is lower than the operational low value. An Over Range condition exists when the signal is higher than the operational high value.

DIMENSIONS

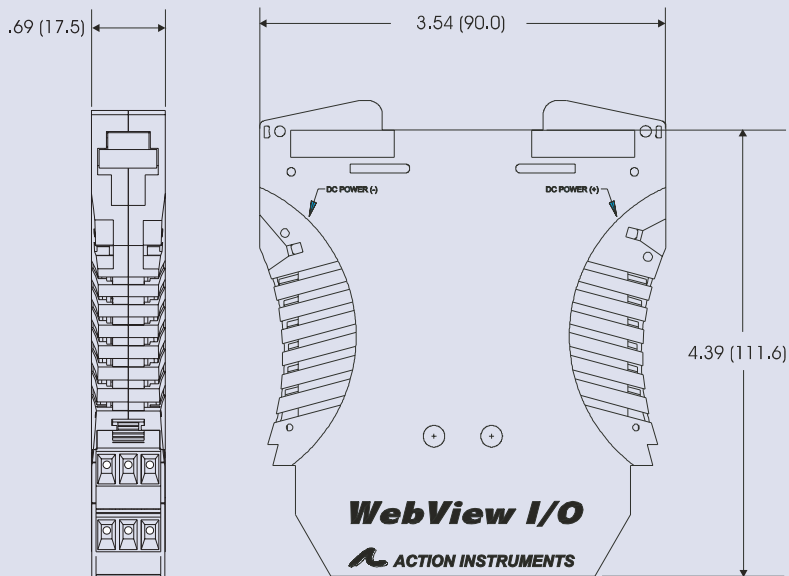

CONFIGURING MODULES

Configuration is accomplished via setting DIP switches and using a push button for adjusting the setpoints. Additionally, it is possible to remotely select the setpoints using an Ethernet connection and the optional WVC16 WebView Communications Interface module. Browsers supported include Internet Explorer 5 or later and Netscape Navigator 4.7. With the addition of the Ethernet interface, the user has the ability to have setpoint trip conditions generate an e-mail message for up to 10 recipients. The module also contains a countdown timer that can be used to notify when routine maintenance is required, such as re-calibration. The internal temperature of the module can also be monitored via the Ethernet connection.

WV SERIES COMMUNICATIONS INTERFACE

Each WVC16 is capable of communicating with up to 32 I/O modules. The interface contains a web page server and an e-mail server as well as being the interface to the modules. All memory to support the signal conditioner's historical data, storage of the web pages and all e-mail messages is contained in the WVC16.


The WVC16 actually downloads a JAVA applet to the client's computer. The applet provides access to the signal conditioner's data. The information available includes the following:

- Module configuration summary
- Module configuration editing
- Diagnostic/warning status
- Alarm setup & status
- E-mail setup, editing & address book
- Process variable viewing

WIRING CONNECTIONS

Pin	Description
11	N.O. Relay B
12	Com. Relay B
13	N.C. Relay B
21	DC Power (+)
22	DC Power (-)
23	No Connection
41	Analog Input (+)
42	Analog Input (-)
43	No Connection
51	N.O. Relay A
52	Com. Relay A
53	N.C. Relay A

TERMINAL DESIGNATIONS

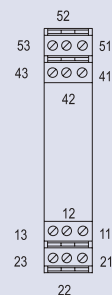

FACTORY ASSISTANCE

For additional information on installation, operation and calibration, please contact Eurotherm's Technical Services Group. Call toll free:

86-411-82650498

SPECIFICATIONS

Inputs

Thermocouples Supported: B, E, J, K, R, S, T

Ranges:	T/C Type	°C	°F
	B	+75 to 1820	+167 to 3308
	E	-265 to 1000	-445 to 1832
	J	-210 to 760	-346 to 1400
	K	-265 to 1372	-445 to 2502
	R	-25 to 1760	-13 to 3200
	S	-25 to 1760	-13 to 3200
	T	-265 to 390	-445 to 734

Overvoltage: ±10V differential

Common Mode: 1800VDC (Input to Ground)

Limit Differentials (deadbands) 0.2% to 100% of span

Set by Push-button Adjustment.

Response Time Dynamic Deadband: Relay status will change when proper setpoint/process condition exists for 100mSec.

Normal Mode: <250mSec (analog filtering)

Setpoint Effectivity: Setpoints are adjustable (by push-button) over 100% of the selected input span

Repeatability: ±0.05% of FS, ±1°C (constant temp)

Relay Contacts 2 SPDT (2 form C) Relays

1 relay per setpoint

Current rating (general use)

120VAC: 5A

240VAC: 2A

28VDC: 5A

Material: Gold flash over silver alloy

Electrical Life: 10⁵ operations

Reset Switch For cycling the relay without cycling power to the unit. (WV128-0001 only)

Local Range Selection

By DIP switch

LED Indication RUN (Green): On when unit is powered

Flashes at 2Hz when input under range.

Flashes at 8Hz when input over range.

SETPOINT A (Red): On when Setpoint A is tripped.

Status for setting Setpoint A

Flashes while calibrating the input level

SETPOINT B (Red): On when Setpoint B is tripped

Status for setting Setpoint B

On while calibrating the input level

Stability ±100ppm of FS/°C

Common Mode

Rejection 120dB @ DC, >90dB @ 60Hz, or better

Isolation ≥ 1800VDC or peak AC between contacts, input & power

ESD

Susceptibility Capable of meeting IEC 801-2 level 3 (8kV)

Humidity

non-condensing Operating: 15 to 95% RH (@45°C)

Soak: 90% RH for 24hrs (@60°C)

Temperature

Operating: 0 to 60°C

Storage: -25 to +85°C

Power

9 to 30VDC

1.2W typical, (3.25W max w/ both relays energized)

Host Module Interface

IR link, same specifications as Phase 1 modules

Wire

Terminations

Screw terminations for 12-22 AWG

Terminal Connections

Terminal Function

11 N.O. Relay B

12 Com. Relay B

13 N.C. Relay B

21 DC Power (+)

22 DC Power (-)

23 No Connection

41 T/C Input (+)

42 T/C Input (-)

43 No Connection

51 N.O. Relay A

52 Com. Relay A

53 N.C. Relay A

Default Configuration

Input: J Type

Output: Dual, SPDT

Trip: A: Hi, B: Lo

Failsafe: No

Deadband: A, B: minimum

Physical

Size

DIN rail case – 0.69" wide (17.5mm), refer to Dimensions drawing

Environmental

Operating Temperature: 0°C to +60°C (32 to 140°F)

Storage Temperature: -25°C to +85°C (-13 to 185°F)

Operating Relative Humidity (non condensing) : 15% to 95%RH at 45°C

Non-operating Relative Humidity: 90%RH at 60°C for 24 hours

Agency Approvals (EMC & Safety)

CE, EN61326, EN61010-1

UL and CSA Combined mark

MODELS & ACCESSORIES

Ordering Information

Specify:

- Model: **WV128-0000** or **WV128-0001**
- Optional Custom Factory Calibration (specify **C620** with desired input and output range.
- Accessories

Accessories

All WV Series modules will mount on standard TS35 (model MD03) DIN rail. In addition, the following accessories are available:

WVC16 WebView Communications Interface

MD03	TS35 x 7.5 DIN Rail (2 meters)
WV905	24VDC Power Supply (0.5 Amp)
H910	24VDC Power Supply (1 Amp)
H915	24VDC Power Supply (2.3 Amp)
MB03	End Bracket for MD03

大连爱克新仪器有限公司

www.actionio.com.cn

辽宁省大连市中山区七七街23号海鹰大厦403室

电话: 0411-82650498 ; 传真: 0411-82650478

Email: Sales@actionio.com.cn Support@actionio.com.cn

